

Specification :

**10 HOLES - 20 X 7.50V ISO 10
13MM**



Max Design Load (Kg/Pcs)	3500
Bolt Hole Number (Pcs)	10
Bolt Hole Dia (mm)	26
Bolt Hole PCD (mm)	335
Hub Hole Dia (mm)	281
Offset (mm)	165
Disc Thickness (mm)	13
Unit Weight (kg)	45
Color	ED Black
Recommended Tire	10.00-20
Type	TT
Application	Medium Truck (MDT)
Truck	Hino, Isuzu, Mitsubishi
Load Rating	146
Salt Spray Test	240

Specification :

**10 HOLES - 20 X 7.50V ISO
10 14MM**



Max Design Load (Kg/Pcs)	3500
Bolt Hole Number (Pcs)	10
Bolt Hole Dia (mm)	26
Bolt Hole PCD (mm)	335
Hub Hole Dia (mm)	281
Offset (mm)	165
Disc Thickness (mm)	13,5
Unit Weight (kg)	46
Color	ED Black
Recommended Tire	10.00-20
Type	TT
Application	MDT
Truck	Isuzu, Mitsubishi
Load Rating	146
Salt Spray Test	240

Specification :

6 HOLES - 16 X 6.00 H164 - 9MM



Max Design Load (Kg/Pcs)	1440
Bolt Hole Number (Pcs)	6
Bolt Hole Dia (mm)	32,5
Bolt Hole PCD (mm)	222,25
Hub Hole Dia (mm)	164
Offset (mm)	127
Disc Thickness (mm)	9
Unit Weight (kg)	21,8
Color	ED Black
Recommended Tire	750-16
Type	TT
Application	LDT
Truck	Mitsubishi, Isuzu
Load Rating	122
Salt Spray Test	240

Specification :

**6 HOLES - 16 X 6.00 TATA-
12MM**



Max Design Load (Kg/Pcs)	1500
-----------------------------	------

Bolt Hole Number (Pcs)	6
---------------------------	---

Bolt Hole Dia (mm)	21
--------------------	----

Bolt Hole PCD (mm)	245
--------------------	-----

Hub Hole Dia (mm)	202
-------------------	-----

Offset (mm)	130
-------------	-----

Disc Thickness (mm)	11,5
---------------------	------

Unit Weight (kg)	
------------------	--

Color	ED Black
-------	----------

Recommended Tire	750-16
------------------	--------

Type	TT
------	----

Application	
-------------	--

Truck	Tata
-------	------

Load Rating	122
-------------	-----

Salt Spray Test (Hour)	240
---------------------------	-----

Specification :

**6 HOLES - 16 X 6.00 H164
12MM**



Max Design Load (Kg/Pcs)	1500
Bolt Hole Number (Pcs)	6
Bolt Hole Dia (mm)	32,50
Bolt Hole PCD (mm)	222,25
Hub Hole Dia (mm)	164
Offset (mm)	130
Disc Thickness (mm)	12
Unit Weight (kg)	22,44
Color	ED Black
Recommended Tire	750-16
Type	TT
Application	LDT Berat
Truck	Mitsubishi, Isuzu
Load Rating	122
Salt Spray Test	240

Specification :


**5 HOLES - 16 X 6.00
H150 12MM**



Max Design Load (Kg/Pcs)	1500
Bolt Hole Number (Pcs)	5
Bolt Hole Dia (mm)	32,50
Bolt Hole PCD (mm)	208
Hub Hole Dia (mm)	150
Offset (mm)	130
Disc Thickness (mm)	12
Unit Weight (kg)	24,1
Color	ED Black
Recommended Tire	750-16
Type	TT
Application	LDT Berat
Truck	Hino, Mitsubishi
Load Rating	122

Specification :

5 HOLES - 16 X 6.00 H150 - 9MM

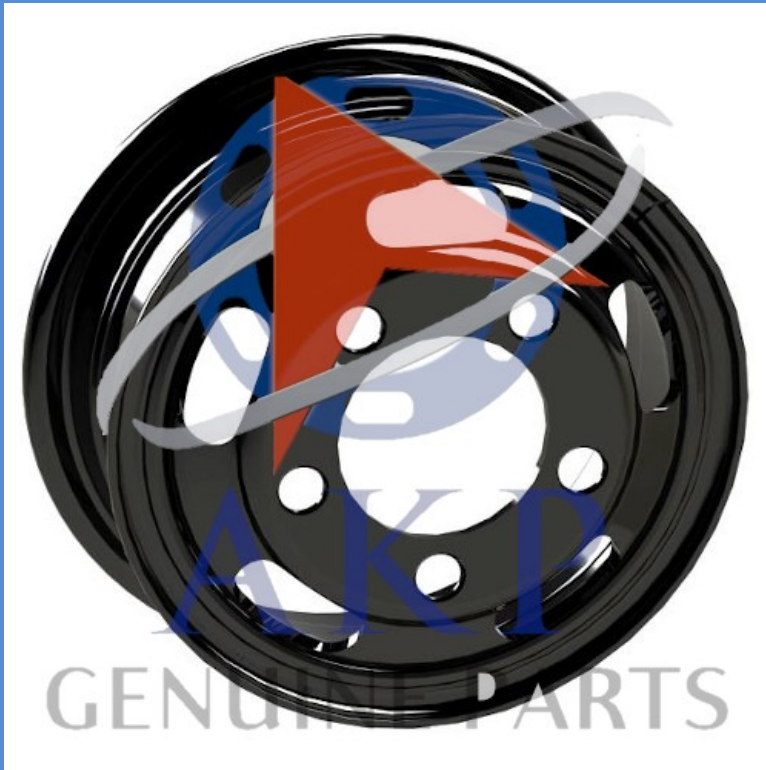

Max Design Load (Kg/Pcs)	1440
Bolt Hole Number (Pcs)	5
Bolt Hole Dia (mm)	32,50
Bolt Hole PCD (mm)	208
Hub Hole Dia (mm)	150
Offset (mm)	127
Disc Thickness (mm)	9
Unit Weight (kg)	21,1
Color	ED Black
Recommended Tire	750-16
Type	TT
Application	LDT
Truck	Hino, Mitsubishi
Load Rating	122
Salt Spray Test	240

Specification :

**10 HOLES - 20 X 7.50V 10
DAIMLER**



Max Design Load (Kg/Pcs)	3500
Bolt Hole Number (Pcs)	10
Bolt Hole Dia (mm)	26
Bolt Hole PCD (mm)	335
Hub Hole Dia (mm)	281
Offset (mm)	165
Disc Thickness (mm)	13
Unit Weight (kg)	46
Color	Silver Top Coat
Recommended Tire	1000-20
Type	TT
Application	MDT
Truck	Mercedes Benz
Load Rating	146

Specification :

10 HOLES - 20 x 8.00V 10H



Max Design Load (Kg/Pcs)	3750
Bolt Hole Number (Pcs)	10
Bolt Hole Dia (mm)	26
Bolt Hole PCD (mm)	335
Hub Hole Dia (mm)	281
Offset (mm)	175
Disc Thickness (mm)	13
Unit Weight (kg)	46,56
Color	ED Black
Recommended Tire	1100-20
Type	TT
Application	MDT
Truck	Hino, Isuzu, Volvo, Mitsubishi, Mercedes-Benz

Specification :


8 HOLES - 20 x 8.00V 8H



Max Design Load (Kg/Pcs)	3750
Bolt Hole Number (Pcs)	8
Bolt Hole Dia (mm)	32,5
Bolt Hole PCD (mm)	285
Hub Hole Dia (mm)	221
Offset (mm)	175
Disc Thickness (mm)	13
Unit Weight (kg)	46
Color	ED Black
Recommended Tire	1100-20
Type	TT
Application	MDT
Truck	Mitsubishi, Hino, Isuzu
Load Rating	150
Salt Spray Test	240

Specification :

14 x 550 - L300

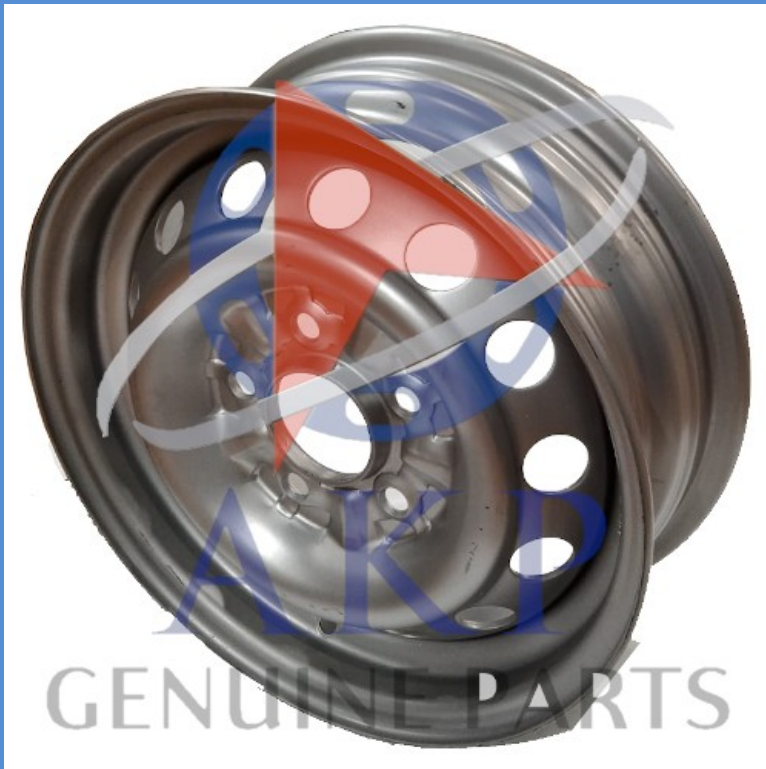

Max Design Load (Kg/Pcs)	875
Bolt Hole Number (Pcs)	5
Bolt Hole Dia (mm)	15
Bolt Hole PCD (mm)	114,3
Hub Hole Dia (mm)	66,5
Offset (mm)	40,5
Disc Thickness (mm)	6,5
Unit Weight (kg)	7,90
Color	Silver Top Coat
Recommended Tire	7.00-14
Type	TL
Application	L300
Truck	Mitsubishi
Load Rating	103
Salt Spray Test	480

Specification :

6 HOLES - 15 x 5.50 H140



Max Design Load (Kg/Pcs)	1385
Bolt Hole Number (Pcs)	6
Bolt Hole Dia (mm)	18,5
Bolt Hole PCD (mm)	180
Hub Hole Dia (mm)	140
Offset (mm)	51
Disc Thickness (mm)	6
Unit Weight (kg)	15,16
Color	ED Black
Recommended Tire	7.50-15
Type	TT
Application	Truck Engkel
Truck	Mitsubishi
Load Rating	119
Salt Spray Test (Hour)	240

Specification :

5 HOLES - 15 x 5.50 H133



Max Design Load (Kg/Pcs)	1385
Bolt Hole Number (Pcs)	6
Bolt Hole Dia (mm)	25,5
Bolt Hole PCD (mm)	184,15
Hub Hole Dia (mm)	133
Offset (mm)	41
Disc Thickness (mm)	6
Unit Weight (kg)	15
Color	ED Black
Recommended Tire	7.50-15
Type	TT
Application	Truck Engkel
Truck	Hino, Toyota
Load Rating	119
Salt Spray Test (Hour)	240

Specification :

6 HOLES - 17,5 x 6.00 BLMP



Max Design Load (Kg/Pcs)	2000
Bolt Hole Number (Pcs)	6
Bolt Hole Dia (mm)	24
Bolt Hole PCD (mm)	222,25
Hub Hole Dia (mm)	161,2
Offset (mm)	128
Disc Thickness (mm)	9,5
Unit Weight (kg)	22,38
Color	Silver Top Coat
Recommended Tire	8,5R17,5
Type	TL
Application	Bus
Truck / Bus	INKA, Ino Bus
Load Rating	121
Salt Spray Test	480

Specification :


6 HOLES - 17,5 x 6.00 TRON-E (Pcs)



Max Design Load (Kg/Pcs)	2000
Bolt Hole Number (Pcs)	6
Bolt Hole Dia (mm)	21
Bolt Hole PCD (mm)	205
Hub Hole Dia (mm)	161,2
Offset (mm)	128
Disc Thickness (mm)	9,5
Unit Weight (kg)	21,54
Color	Silver Top Coat
Recommended Tire	8,5R17,5
Type	TL
Application	Bus
Truck / Bus	INKA, Ino Bus
Load Rating	121
Salt Spray Test	480

Specification :

**6 HOLES - 17,5 x 6.00
SUNRISE**

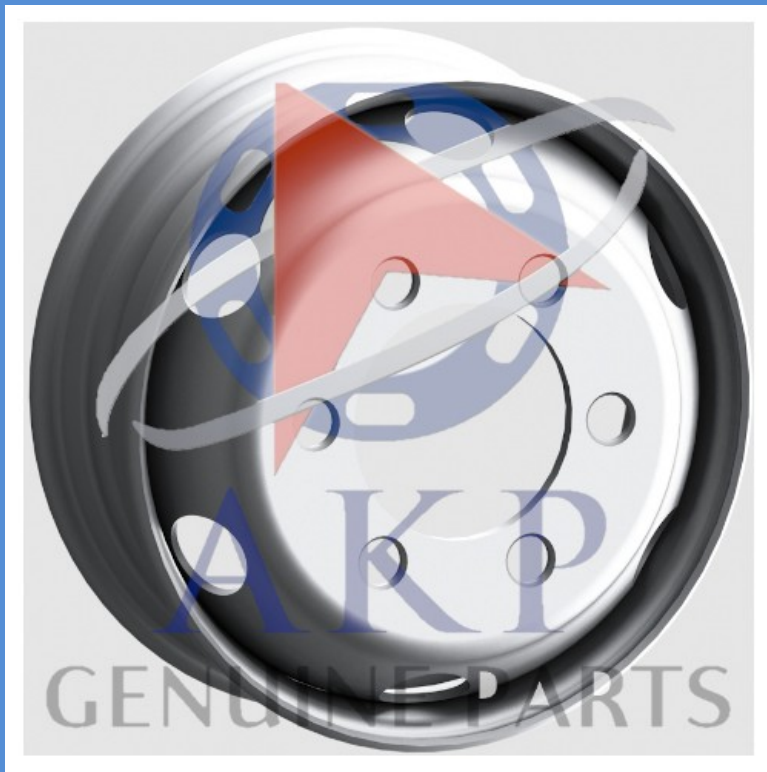

Max Design Load (Kg/Pcs)	2000
Bolt Hole Number (Pcs)	6
Bolt Hole Dia (mm)	31,5
Bolt Hole PCD (mm)	222,25
Hub Hole Dia (mm)	164
Offset (mm)	135
Disc Thickness (mm)	11,75
Unit Weight (kg)	24,01
Color	Silver Top Coat
Recommended Tire	8,5R17,5
Type	TL
Application	Bus
Truck	Hino
Load Rating	121
Salt Spray Test	480

Specification :


5 HOLES - 16 x 6.00 H146



Max Design Load (Kg/Pcs)	1440
Bolt Hole Number (Pcs)	5
Bolt Hole Dia (mm)	29
Bolt Hole PCD (mm)	203,20
Hub Hole Dia (mm)	146
Offset (mm)	127
Disc Thickness (mm)	9
Unit Weight (kg)	21,66
Color	ED Black
Recommended Tire	750-16
Type	TT
Application	LDT
Truck	Isuzu
Load Rating	122
Salt Spray Test (Hour)	240

Specification :

**6 HOLES - 16 x 6.00 - 30
9MM**

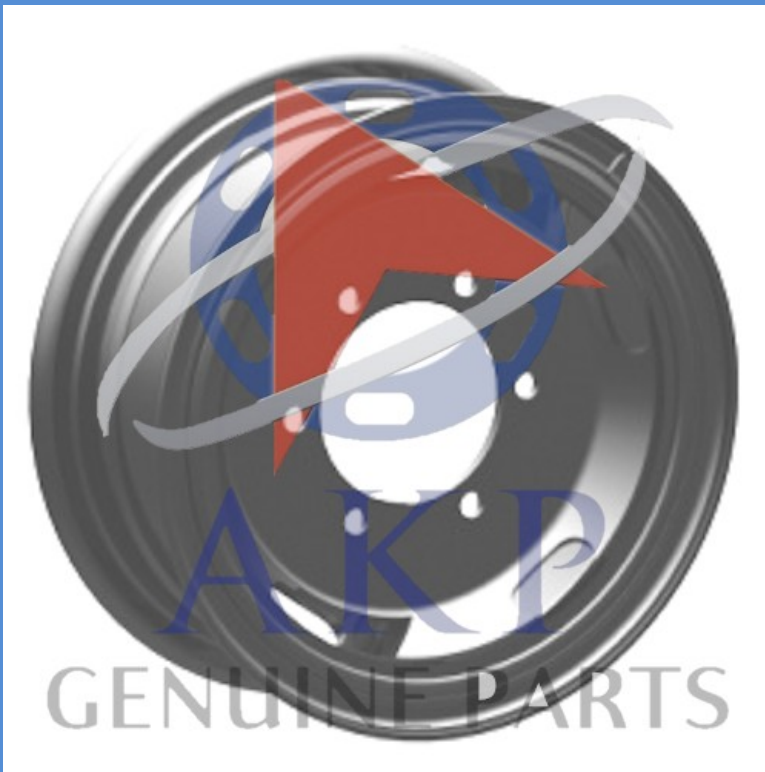

Max Design Load
(Kg/Pcs)

Bolt Hole Number (Pcs)	6
---------------------------	---

Bolt Hole Dia (mm)	18
--------------------	----

Bolt Hole PCD (mm)	179,95
--------------------	--------

Hub Hole Dia (mm)	140,5
-------------------	-------

Offset (mm)	29,8
-------------	------

Disc Thickness (mm)	9
---------------------	---

Unit Weight (kg)	21,8
------------------	------

Color	ED Black
-------	----------

Recommended Tire	750-16
------------------	--------

Type	TT
------	----

Application	Engkel
-------------	--------

Truck	Mitsubishi
-------	------------

Load Rating	122
-------------	-----

Salt Spray Test (Hour)	240
---------------------------	-----

Specification :

**10 HOLES - 20 x 7.00T6 10H
12MM**



Max Design Load (Kg/Pcs)	3000
-----------------------------	------

Bolt Hole Number (Pcs)	10
---------------------------	----

Bolt Hole Dia (mm)	26
--------------------	----

Bolt Hole PCD (mm)	335
--------------------	-----

Hub Hole Dia (mm)	281
-------------------	-----

Offset (mm)	162
-------------	-----

Disc Thickness (mm)	12
---------------------	----

Unit Weight (kg)	41,5
------------------	------

Color	ED Black
-------	----------

Recommended Tire	900-20
------------------	--------

Type	TT
------	----

Application	MDT
-------------	-----

Truck	Hino
-------	------

Load Rating	141
-------------	-----

Salt Spray Test (Hour)	240
---------------------------	-----

Specification :

**8 HOLES - 20 x 7.00T6 8H
12MM**



Max Design Load (Kg/Pcs)	3000
Bolt Hole Number (Pcs)	8
Bolt Hole Dia (mm)	32,5
Bolt Hole PCD (mm)	285
Hub Hole Dia (mm)	221
Offset (mm)	162
Disc Thickness (mm)	12
Unit Weight (kg)	40,72
Color	ED Black
Recommended Tire	41,5
Type	TT
Application	900-20
Truck	Mitsubishi, Hino, Isuzu
Load Rating	141
Salt Spray Test	240

Specification :

**8 HOLES - 20 x 7.00T6 8H
13MM**



Max Design Load (Kg/Pcs)	3000
Bolt Hole Number (Pcs)	8
Bolt Hole Dia (mm)	32,5
Bolt Hole PCD (mm)	285
Hub Hole Dia (mm)	221
Offset (mm)	162
Disc Thickness (mm)	13
Unit Weight (kg)	40,72
Color	ED Black
Recommended Tire	900-20
Type	TT
Application	MDT
Truck	Mtsubishi, Hino
Load Rating	141
Salt Spray Test	240

Specification :


8 HOLES - 20 x 7.50V 8H



Max Design Load (Kg/Pcs)	3500
Bolt Hole Number (Pcs)	8
Bolt Hole Dia (mm)	32,5
Bolt Hole PCD (mm)	285
Hub Hole Dia (mm)	221
Offset (mm)	160
Disc Thickness (mm)	12
Unit Weight (kg)	45
Color	ED Black
Recommended Tire	1000-20
Type	TT
Application	MDT
Truck	Mitsubishi, Hino
Load Rating	146
Salt Spray Test	240

Specification :


**8 HOLES - 22,5 x 8.25V 8H
TUBELESS**

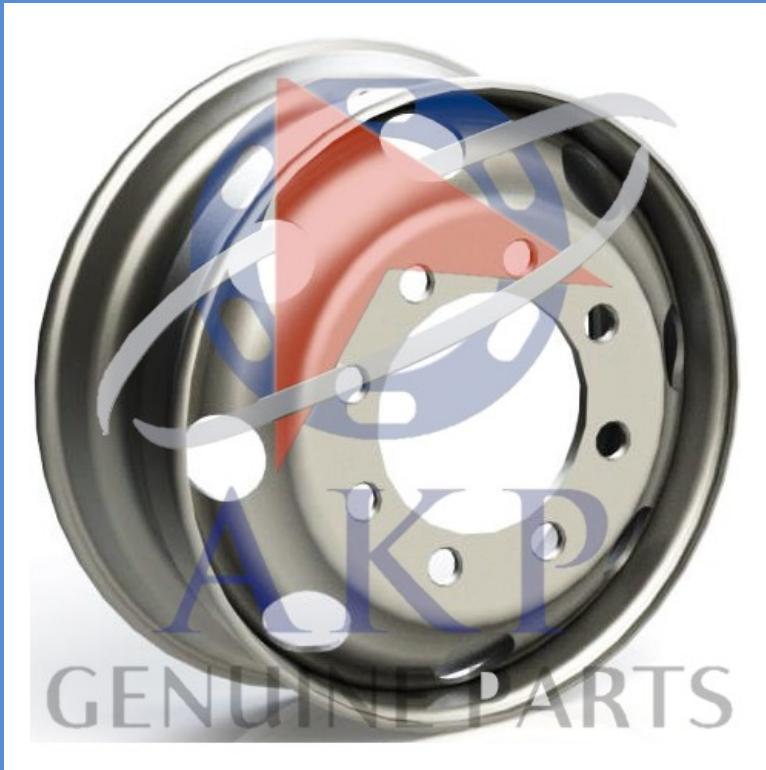

Max Design Load (Kg/Pcs)	3350
Bolt Hole Number (Pcs)	8
Bolt Hole Dia (mm)	32
Bolt Hole PCD (mm)	285
Hub Hole Dia (mm)	222
Offset (mm)	165
Disc Thickness (mm)	14
Unit Weight (kg)	42,06
Color	Silver Top Coat
Recommended Tire	11R22.5
Type	TL
Application	Bus , Pertamina
Truck	Mitsubishi, Hino
Load Rating	148

Specification :

**8 HOLES - 22,5 x 8.25V 8H
TUBELESS ALLOY**

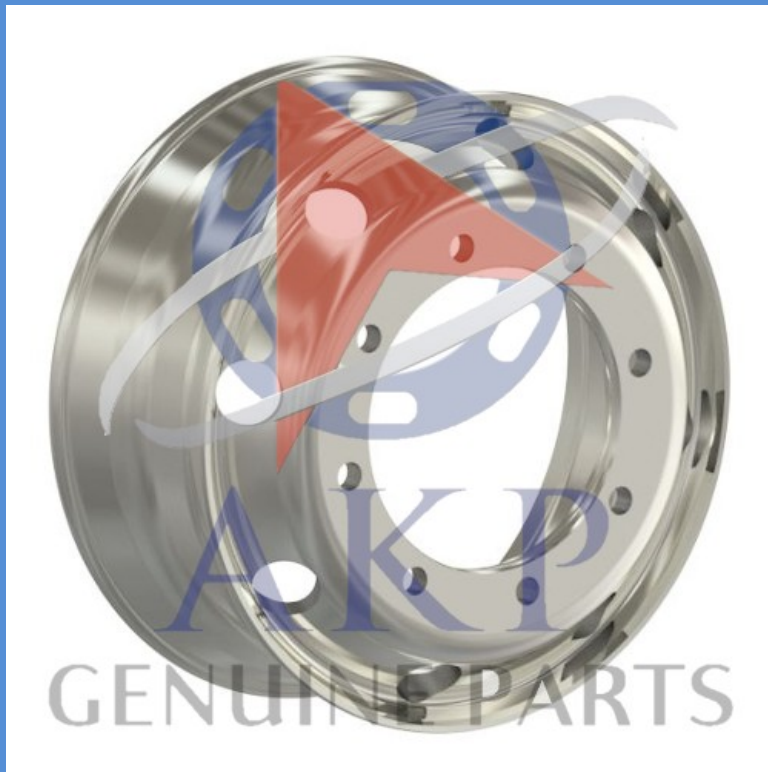

Max Design Load (Kg/Pcs)	3650
Bolt Hole Number (Pcs)	8
Bolt Hole Dia (mm)	32,5
Bolt Hole PCD (mm)	285
Hub Hole Dia (mm)	222
Offset (mm)	168,5
Disc Thickness (mm)	24,5
Unit Weight (kg)	24,84
Color	Silver Top Coat
Recommended Tire	11R22,5
Type	TL
Application	Bus , Pertamina
Truck	Hino Bus
Load Rating	148

Specification :


**10 HOLES - 22,5 x 8.25V 10H
TUBELESS**



Max Design Load (Kg/Pcs)	3350
Bolt Hole Number (Pcs)	10
Bolt Hole Dia (mm)	26
Bolt Hole PCD (mm)	335
Hub Hole Dia (mm)	281
Offset (mm)	165
Disc Thickness (mm)	14
Unit Weight (kg)	39,30
Color	Silver Top Coat
Recommended Tire	11R22,5
Type	TL
Application	Bus , Pertamina
Truck	Mitsubishi, Hino, Isuzu, Mercedes Benz

Specification :

**10 HOLES - 22,5 x 8.25V 10H
TUBELESS ALLOY**

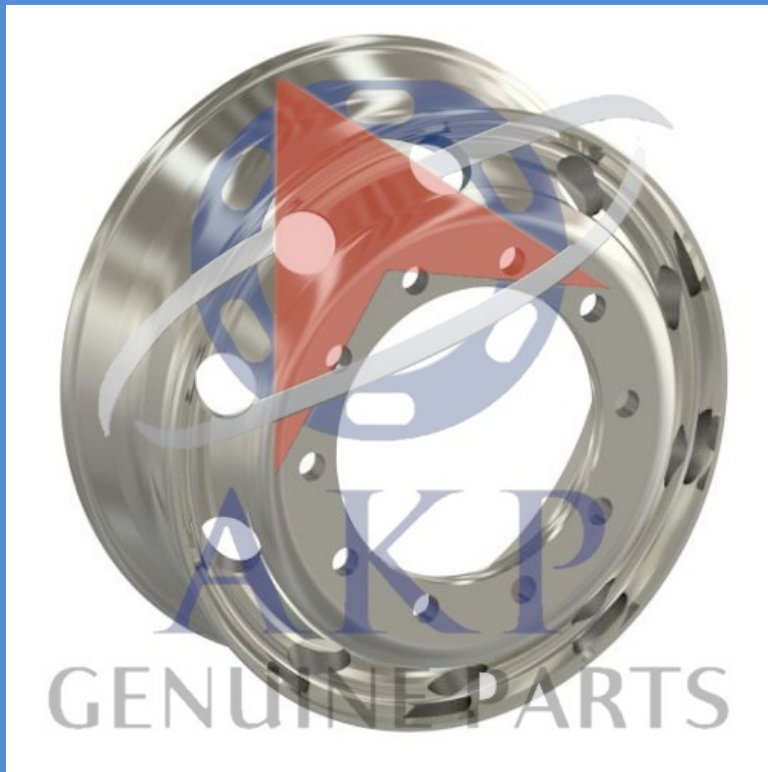

Max Design Load (Kg/Pcs)	3650
Bolt Hole Number (Pcs)	10
Bolt Hole Dia (mm)	26,75
Bolt Hole PCD (mm)	335
Hub Hole Dia (mm)	281
Offset (mm)	167
Disc Thickness (mm)	24,5
Unit Weight (kg)	25,2
Color	Silver Top Coat
Recommended Tire	11R22,5
Type	TL
Application	Bus , Pertamina
Truck	Mercedes Benz Bus
Load Rating	148

Specification :


**10 HOLES - 22,5 x 9.00V 10H
- 16MM**



Max Design Load (Kg/Pcs)	4000
Bolt Hole Number (Pcs)	10
Bolt Hole Dia (mm)	26
Bolt Hole PCD (mm)	335
Hub Hole Dia (mm)	281
Offset (mm)	175
Disc Thickness (mm)	16
Unit Weight (kg)	41,18
Color	Silver Top Coat
Recommended Tire	12R22,5
Type	TL
Application	Logistic , Mining
Truck	Hino, Isuzu, Mitsubishi, Mercedes Benz

Specification :

**10 HOLES - 24 x 8.50V 10H
14MM**

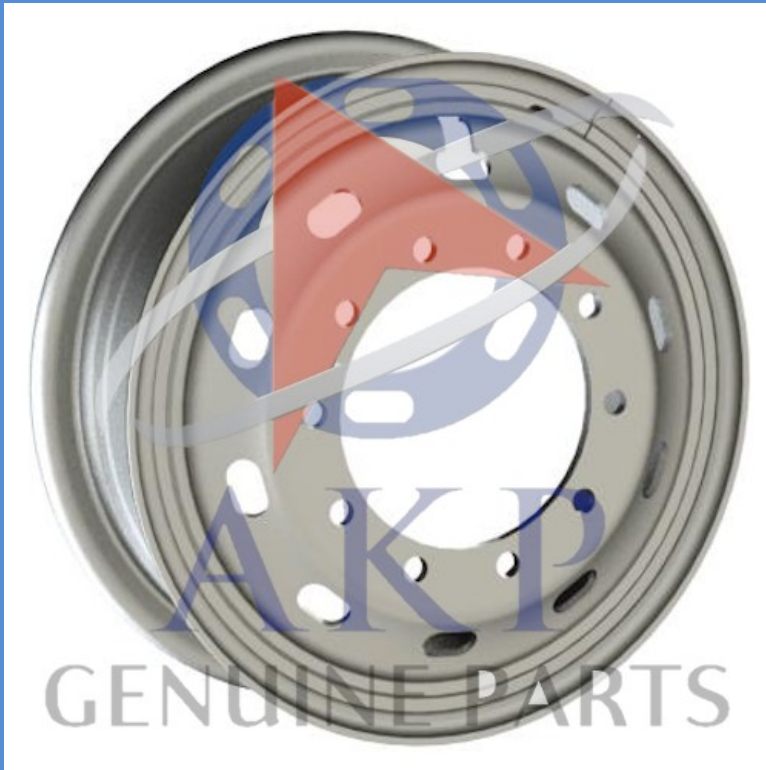

Max Design Load
(Kg/Pcs)

Bolt Hole Number
(Pcs) 10

Bolt Hole Dia (mm) 26

Bolt Hole PCD (mm) 335

Hub Hole Dia (mm) 281

Offset (mm) 180

Disc Thickness (mm) 14

Unit Weight (kg) 70

Color ED Black

Recommended Tire 1200-24

Type TT

Application HD Mining

Truck Scania, Volvo

Load Rating 158

Salt Spray Test
(Hour) 240

Specification :

**10 HOLES - 24 x 8.50V 10H
16MM**



Max Design Load (Kg/Pcs)	5000
Bolt Hole Number (Pcs)	10
Bolt Hole Dia (mm)	26
Bolt Hole PCD (mm)	335
Hub Hole Dia (mm)	281
Offset (mm)	180
Disc Thickness (mm)	16
Unit Weight (kg)	75
Color	Silver Top Coat
Recommended Tire	1200-24
Type	TT
Application	HD Mining
Truck	Scania, Volvo
Load Rating	158
Salt Spray Test	480

Specification :

**10 HOLES - 24 x 8.50V 10H
16MM
TUBELESS**



Max Design Load (Kg/Pcs)	5000
Bolt Hole Number (Pcs)	10
Bolt Hole Dia (mm)	26
Bolt Hole PCD (mm)	335
Hub Hole Dia (mm)	281
Offset (mm)	180
Disc Thickness (mm)	16
Unit Weight (kg)	62,7
Color	Silver Top Coat
Recommended Tire	12R24
Type	TL
Application	HD Mining
Truck	Scania, Volvo
Load Rating	158
Salt Spray Test	480

Specification :

**10 HOLES - 24 x 8.50V 10H
18MM**



Max Design Load (Kg/Pcs)	6500
Bolt Hole Number (Pcs)	10
Bolt Hole Dia (mm)	26
Bolt Hole PCD (mm)	335
Hub Hole Dia (mm)	281
Offset (mm)	180
Disc Thickness (mm)	18
Unit Weight (kg)	79,72
Color	Silver Top Coat
Recommended Tire	1200-24
Type	TT
Application	HD Mining
Truck	Scania, Volvo
Load Rating	160
Salt Spray Test	480

Specification :

**10 HOLES - 20 x 7.50V 10H
14MM
XINJIDA**



Max Design Load
(Kg/Pcs)

Bolt Hole Number
(Pcs) 10

Bolt Hole Dia (mm) 26

Bolt Hole PCD (mm) 335

Hub Hole Dia (mm) 281

Offset (mm) 165

Disc Thickness (mm) 14

Unit Weight (kg) 39,04

Color ED Black

Recommended Tire 1000-20

Type TT

Application

Truck

Load Rating 146

Salt Spray Test
(Hour) 240

Specification :

5 HOLES - 16 x 6.50 5H 12MM



Max Design Load (Kg/Pcs)	2200
Bolt Hole Number (Pcs)	5
Bolt Hole Dia (mm)	32,5
Bolt Hole PCD (mm)	208
Hub Hole Dia (mm)	150
Offset (mm)	139
Disc Thickness (mm)	12
Unit Weight (kg)	25.12
Color	ED Black
Recommended Tire	825-16
Type	TT
Application	LDT Berat
Truck	Mitsubishi, Hino, Isuzu LDT Heavy Duty
Load Rating	126

Specification :

6 HOLES - 16 x 6.50 6H 12MM



Max Design Load (Kg/Pcs)	2200
Bolt Hole Number (Pcs)	6
Bolt Hole Dia (mm)	32,5
Bolt Hole PCD (mm)	222,25
Hub Hole Dia (mm)	164
Offset (mm)	139
Disc Thickness (mm)	12
Unit Weight (kg)	25,72
Color	ED Black
Recommended Tire	825-16
Type	TT
Application	LDT Berat/Heavy Duty
Truck	Mitsubishi, Hino, Isuzu LDT Heavy Duty

Specification :

10 HOLES - 20 x 8.50 10H



Max Design Load (Kg/Pcs)	5000
-----------------------------	------

Bolt Hole Number (Pcs)	10
---------------------------	----

Bolt Hole Dia (mm)	26
--------------------	----

Bolt Hole PCD (mm)	335
--------------------	-----

Hub Hole Dia (mm)	281
-------------------	-----

Offset (mm)	175
-------------	-----

Disc Thickness (mm)	16
---------------------	----

Unit Weight (kg)	53,56
------------------	-------

Color	ED Black
-------	----------

Recommended Tire	1200-20
------------------	---------

Type	TT
------	----

Application	Mining
-------------	--------

Truck	Kamaz
-------	-------

Load Rating	154
-------------	-----

Salt Spray Test (Hour)	240
---------------------------	-----